



When the lid hinges are mounted on the bottom bracket, they fit as pictured above.



The drivers side is also secured with C-Clamps and adjustments are done for alignment.




The bottom edges are mounted and then clamped into place to start the alignment before welding to the frame.



With this close-up view, you can see how the bottom hinge bracket sits on the tubular frame.



Looking at the passenger side, note the "C-clamp" used to secure the bracket for alignment. The deck lid should be raised and lowered numerous times before deciding it is in the right position.

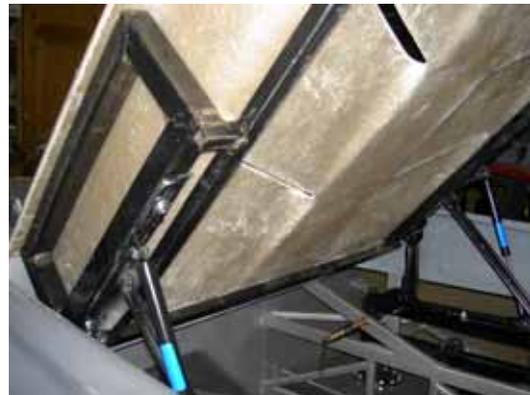

Viewing the engine deck lid mounted on the 4 brackets both hinges, you can see the installation works quite nicely. The Camaro hinges allow the deck lid to move back and up simultaneously.